



# KÖMMERLING PREMISLIDE 76

Sliding system.



**KÖMMERLING®**



**SLIDING – WITH EASE**  
**UNIQUE – IN ITS PRODUCT CLASS**  
**VARIED – AS WINDOW OR DOOR**

# PREMISLIDE 76

The high quality sliding system for more comfort in your home.



- Space saving during opening.
- Large glazed areas.
- Great design possibilities.
- Effective ventilation.



# The KÖMMERLING PremiSlide 76 sliding system offers a whole new range of options for integrating windows and doors with outstanding engineering properties in the facade.

This sliding system with 76 mm construction depth is ideal for both homes and public buildings such as schools, offices, etc. Exhibiting a standard  $U_f$  value as high as  $1.4 \text{ W}/(\text{m}^2\text{K})$ , KÖMMERLING PremiSlide 76 achieves the best energy saving values in its product class. The special hardware "ECO SLIDE" from the cooperation partner Siegenia perfects the functionality.

1

## THERMAL INSULATION

Design based on KÖMMERLING 76 double seal system.  $U_f$  value up to  $1.4 \text{ W}/(\text{m}^2\text{K})$  as standard.



2

## WEATHER TIGHTNESS

High-quality circumferential EPDM seal.



3

## GLAZING

Triple glazing up to 48 mm thick. Sound insulation up to 45 dB.



4

## DESIGN

Slender profile sight line in both the fixed and sliding sections.



5

## TECHNOLOGY


Solid technology thanks to ECO SLIDE hardware system.



6


## VENTILATION

Effective gap ventilation thanks to ECO SLIDE carriages.

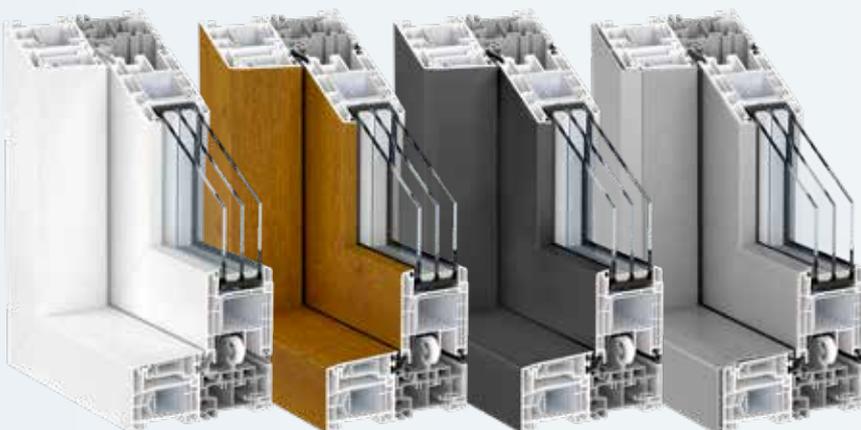

## Colour designs

The sliding system leaves nothing to be desired. Whether classical white PVC, laminated, plain or metallic colours, woodgrains, or the aluminium cover variant AluClip are concerned – everything exactly according to your wishes.

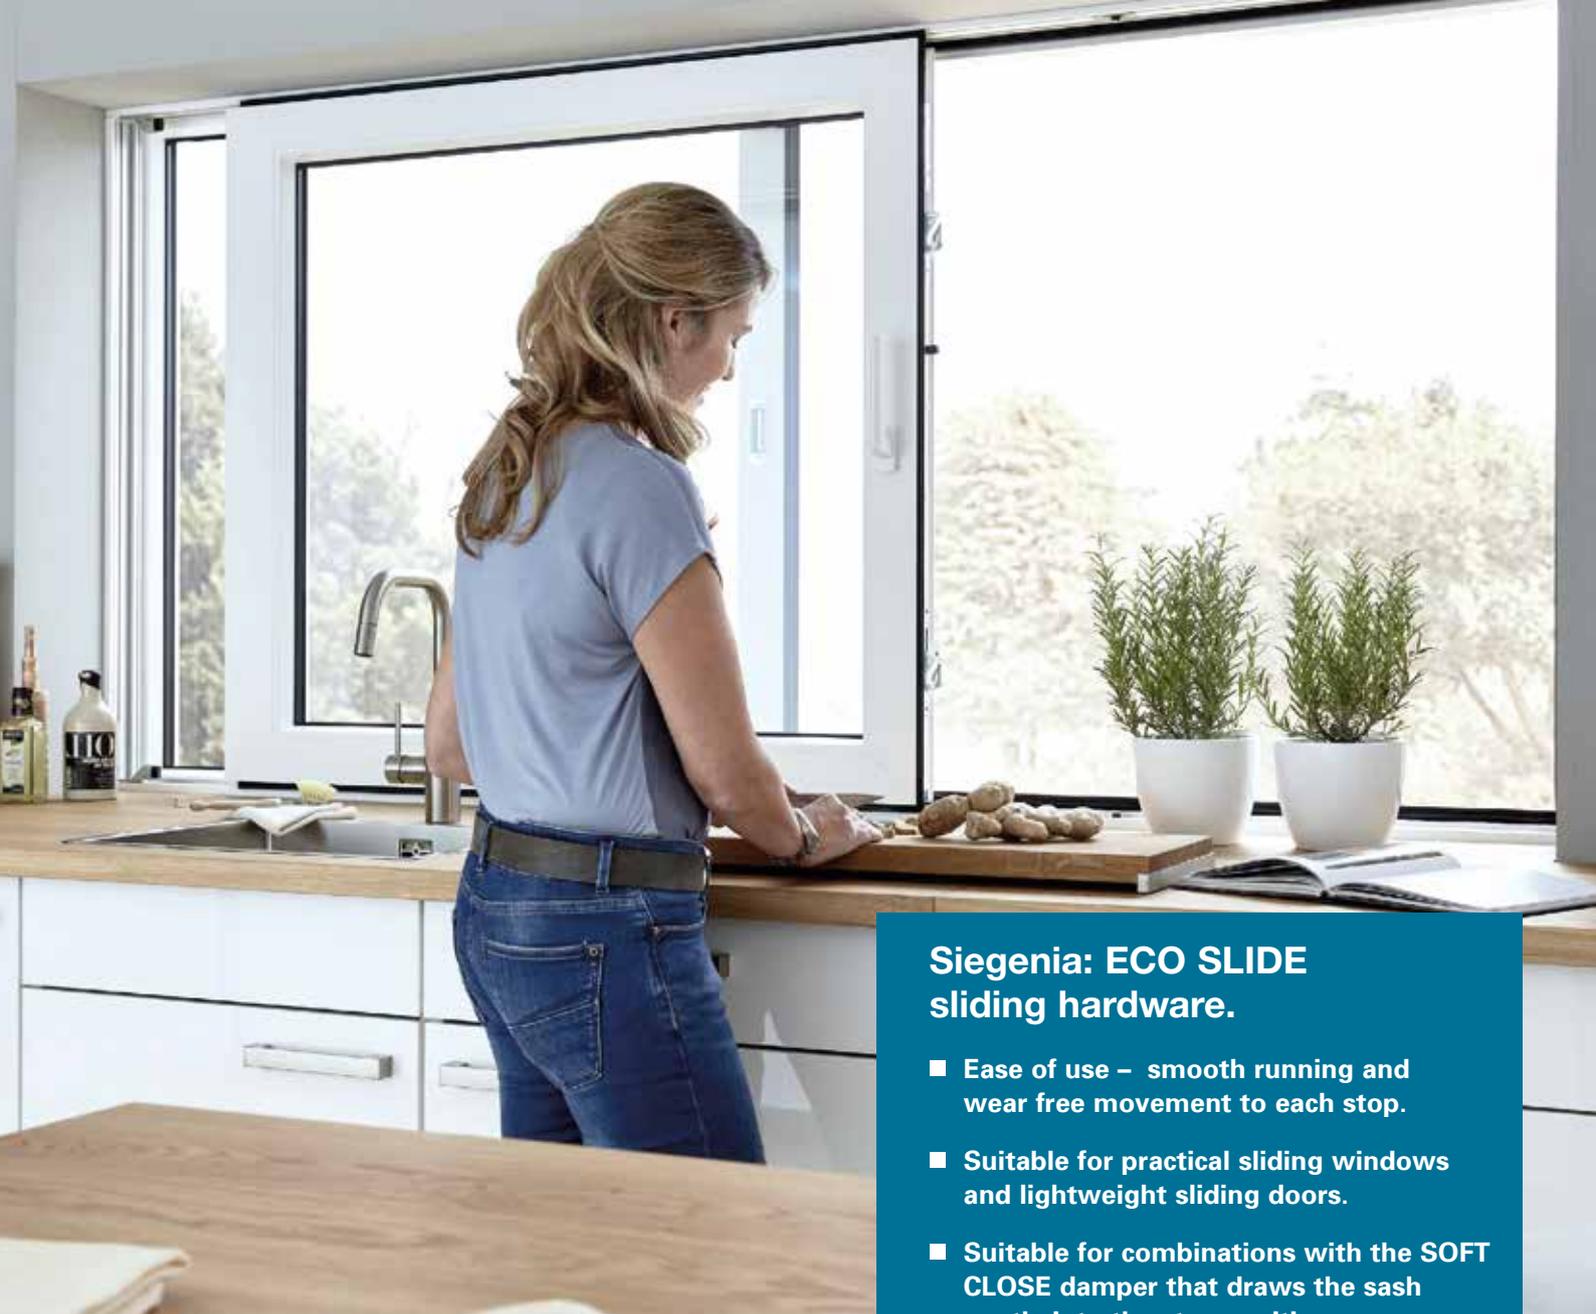

## Siegenia: ECO SLIDE sliding hardware.

- Ease of use – smooth running and wear free movement to each stop.
- Suitable for practical sliding windows and lightweight sliding doors.
- Suitable for combinations with the SOFT CLOSE damper that draws the sash gently into the stop position.

### It's the combination that makes the difference!

The ECO SLIDE carriages can move sideways, taking up gently the sashes' movements for a smooth sliding motion.

The SOFT CLOSE damper brakes the sash shortly before the end stop and then gently pulls it into the locking position. This minimises the risk of injury and excess loading on the window elements.



The special locking hook of high quality brass allows an arrested gap ventilation position of the sliding sash.

**profine GmbH**  
KÖMMERLING KUNSTSTOFFE

P.O. Box 2165 · 66929 Pirmasens · Germany  
Phone +49 6331 56-0 · Fax +49 6331 56-2475  
info@koemmerling.de  
www.koemmerling.com

