



## KomaDoor

KomaDoor is a precision engineered, lift and slide door solution that has been designed to bring in the maximum amount of light in all modern living environments, and has been fully hurricane tested. It's capable of achieving heights up to 9.5ft and a width of 21.5ft in a two-panel design, with three and four panel options.



**KÖMMERLING®**

**Kommerling USA Inc**  
3415 Stanwood Blvd,  
Huntsville, AL 35811,  
United States

Phone: +1 256 690 3626  
aris.dimos@kommerlingusa.com  
www.kommerling.us

# KomaDoor


## Features & Benefits

KomaDoor is an impressive and capable lift and slide door system, designed to enrich any new construction or home remodelling project. We can also offer our System 76 tilt and turn window system, which is designed to perfectly complement the KomaDoor system with matching colours, finishes and the aluminium AluClip exterior, for a complete building solution.



- Installation depth of 8.15in with a frame sightline of just 2.56in
- Five-chambered sash, just 3.46in deep with a 3.94in sightline
- Slimline Lux variant offers a greater passage of light
- Suitable for internal and external double or triple glazing
- Very low, thermally broken cill
- High performance running tracks and hardware, designed for longevity
- Heavy duty steel reinforcement adds structural strength for large sizes
- Highly energy efficient and offers impressive sound insulation values
- Wide range of colour, woodgrain and aluminium AluClip cover options
- Invisible drainage adds further design detail

## Colours and finishes

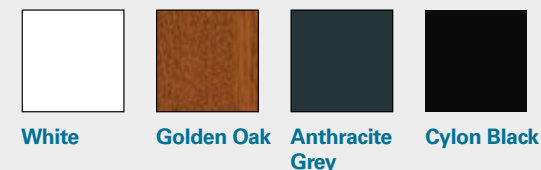

Product	Test Size	Overall Rating	Air Infiltration	Air Exfiltration	Water Pressure (PSF)	Structural Pressure (psf) +/-	Test Stats
<b>XO KomaDoor</b>	120" x 98"	CW-PG45	<0.01	0.01	15.25 psf	+/- 45 psf	AAMA/WDMA/CSA 101/I.S.2/A440-08 and -11
<b>XO KomaDoor - HP reinforced</b>	120" x 98"	CW-PG65	<0.01	0.01	15.25 psf	+/- 60 psf	AAMA/WDMA/CSA 101/I.S.2/A440-08 and -11
<b>XO KomaDoor</b>	120" x 98"	LC-PG60	<0.01	0.01	15.25 psf	+/- 60 psf	AAMA/WDMA/CSA 101/I.S.2/A440-08 and -11
<b>OXXO KomaDoor</b>				OXXO door tests cover the OXXO door configuration			
<b>OXXO KomaDoor</b>	255.9" x 114.17"	CW-PG35	<0.01	<0.01	12.95 psf	+/- 35 psf	AAMA/WDMA/CSA 101/I.S.2/A440-08 and -11
<b>OXXO KomaDoor</b>	255.9" x 114.17"	LC-PG55	<0.01	<0.01	12.95 psf	+/- 60 psf	AAMA/WDMA/CSA 101/I.S.2/A440-08 and -11
<b>XO KomaDoor - Impact</b>	180" x 96.06"	-	<0.01	None	8.25	+/- 55 psf	TAS 201, 202, 203
<b>OXXO KomaDoor - Impact</b>	255.9" x 114.17"	-	<0.01	None	8.25	+/- 55 psf	TAS 201, 202, 203